


Dry Wall Stop Bead

Designed for thin coat edge protection at openings and for providing abutments of plastered areas to other wall finishes. Light but extremely rigid, the scalloped edge provides for efficient keying and excellent finish.

Code	Qty /Box	Length (mm)	Plaster depth	Use
DWSB3/2.4	50	2400	3mm	❶
DWSB3/3.0	50	3000	3mm	❶
DWSB6/2.4	50	2400	6mm	❶
DWSB6/3.0	50	3000	6mm	❶

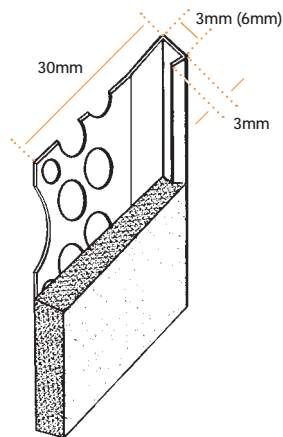


DWSB6 dimensions in brackets.

Plaster depths – 3mm & 6mm
Flange width – 30mm
Galvanized Steel to
BSEN 10327-DX51D+Z275

Plasterboard Edging Bead

Used to reinforce plasterboard edges with the perforated flange fixed flush to the board face prior to the final skim coat. The bead may also be fixed with the flange flush to the inner surface of the board for use in projection wall panelling.

Code	Qty /Box	Length (mm)	Plaster board	Use
PBEB10/3.0	50	3000	9.5mm	❶
PBEB13/3.0	50	3000	12.5mm	❶

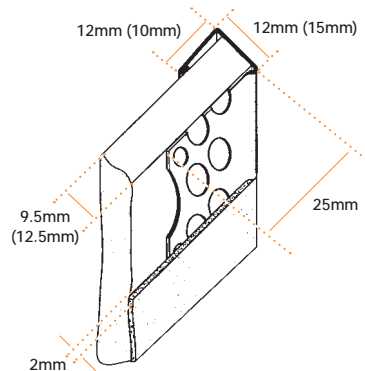

PBEB13 dimensions in brackets.

Plasterboard depth – 9.5mm, 12.5mm
Flange width – 25mm
Galvanized Steel to
BSEN 10327-DX51D+Z275