

YBS Insulation

HIGH QUALITY PRODUCTS FOR THE BUILDING INDUSTRY



Easi-Close

Easy fit insulated cavity closer



FULLY CERTIFIED

MEETS 2010 BUILDING
REGULATIONS

AVAILABLE IN TWO PROFILES
TO FIT CAVITIES UP TO 150MM

EASILY CUT TO FIT THE
EXACT CAVITY SIZE

FULLY RIGID PLASTIC
CAVITY CLOSER

Two profiles available:

50mm - 100mm

100mm - 150mm

www.ybsinsulation.com

INSTALLATION

Easi-Close can be installed in a variety of ways:




- * Tack to window frame if built-in.
- * Built-in as work progresses friction fitting.
- * Easi-Close can be installed after the reveal has been constructed by fixing to the inner leaf using grab adhesive.

Vertical Jointing

If required, sections of Easi-Close can be jointed to minimise waste. All joints must be tightly butted - 45° downwards towards the outer leaf. This will stop potential water penetration.

Corner Jointing

When Jointing horizontal to vertical, trim both PVC flanges and allow the vertical to extend below the horizontal - this stops water ingress.

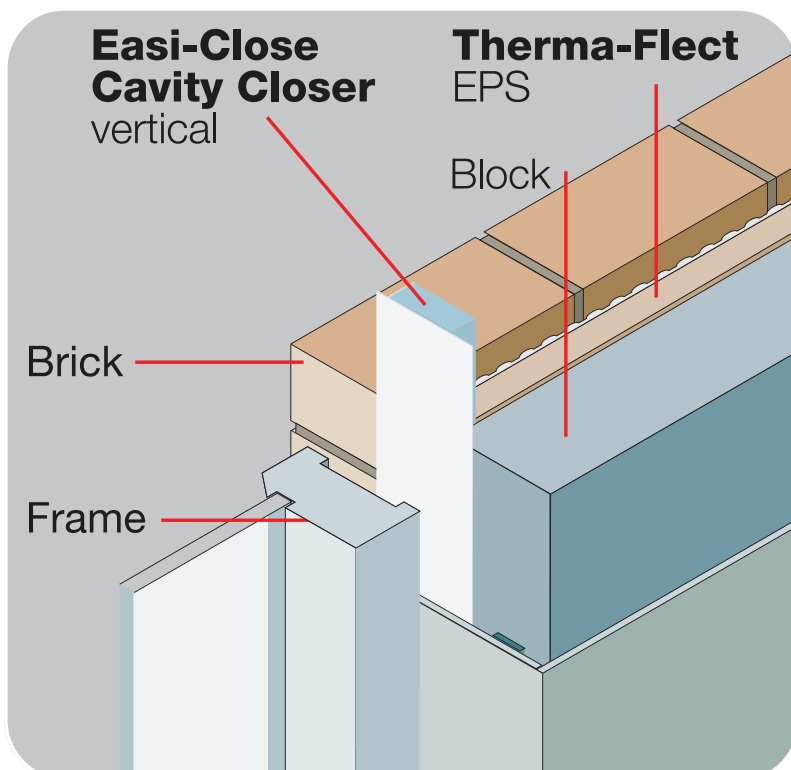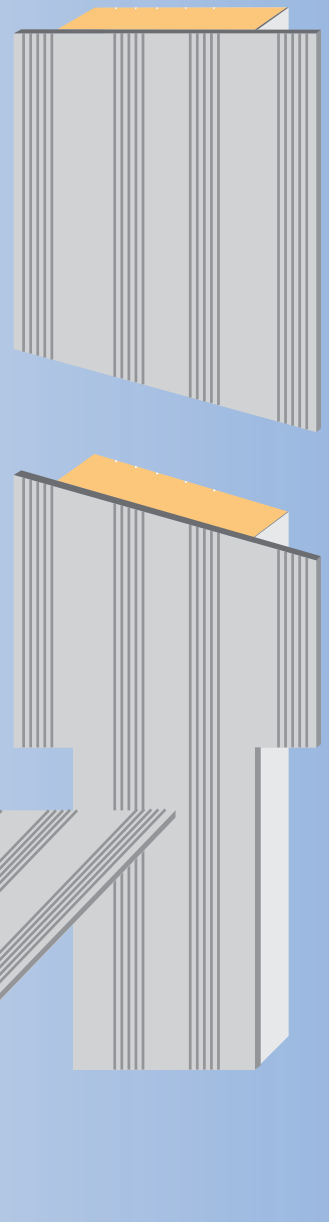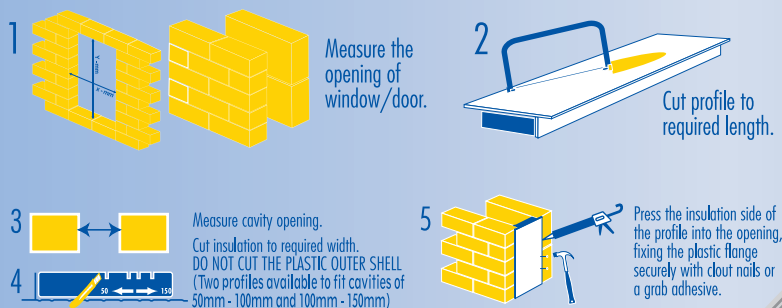

YBS Insulation

HIGH QUALITY PRODUCTS FOR THE BUILDING INDUSTRY

Yorkshire Building Services (WHITWELL) Ltd

Crags Industrial Park,
Morven Street,
Creswell,
Derbyshire,
S80 4AJ

Tel: 0844 99 100 44

Fax: 0844 99 100 55

E-Mail: sales@ybsinsulation.com

Web: www.ybsinsulation.com